

On air temperature distribution and ISO 7726-defined heterogeneity inside a typical greenhouse in Almería

Rubén A. García-Ruiz^{a,*}, Javier López-Martínez^a, José L. Blanco-Claraco^a, José Pérez-Alonso^a, Ángel J. Callejón-Ferre^{a,b}

^a*Department of Engineering, University of Almería, Agrifood Campus of International Excellence (ceiA3), Ctra. de Sacramento s/n, 04120, Almería, Spain.*

^b*Laboratory-Observatory Andalusian Working Conditions in the Agricultural Sector (LASA). C/ Albert Einstein s/n. 2^a planta. Isla de la Cartuja, 41092 Sevilla, Spain.*

Abstract

Studies about the air temperature inside greenhouses are usually focused on the crop growth. However, the thermal environment inside greenhouses can affect the safety of the workers and also their productivity. This work focuses on the study of air temperature conditions with respect to workers following the requirements and methods gathered in ISO 7726, which indicates that measurements should be taken at different points in both, horizontal and vertical directions in order to study heterogeneous thermal environments. For the present work, data were gathered by the Wireless Sensor Network (WSN) designed in our previous work, hereby extended by an experimental campaign carried out during a complete year in a typical greenhouse in Almería. The aim is performing a long-term study of air temperature inside a greenhouse as well as the assessment of air temperature heterogeneity. The results, which allow characterizing air temperature inside the greenhouse, prove the existence of patterns of heterogeneity as a function of the incidence of sunlight and time of day. During the analysed period, air temperature heterogeneity is mainly present in the central hours of the day and it is higher in the horizontal dimension rather than vertically. In addition, it has been observed that the vast majority of homogeneous days correlate with cloudy days. Finally, based on the results obtained some recommendations are presented for assessing the thermal environment of greenhouses.

Keywords: Greenhouse, thermal environment, heat stress, air temperature distribution, heterogeneous environment.

1. Introduction

Areas of the South of Europe and specially Mediterranean coastal areas meet the optimum environmental conditions for growing vegetables in plastic-covered greenhouses (Hernández et al., 2017). Specifically, in

*Corresponding author. Email address: rgr051@ual.es, Tel. +34 950 214 233

Email addresses: rgr051@ual.es (Rubén A. García-Ruiz), javier.lopez@ual.es (Javier López-Martínez), jlblanco@ual.es (José L. Blanco-Claraco), jpalonso@ual.es (José Pérez-Alonso), acallejo@ual.es (Ángel J. Callejón-Ferre)

Almería (Spain) they cover approximately 30000 ha, the largest extension of greenhouses worldwide. Consequently, around 55000 workers are employed each year in Almería (Cabrera et al., 2016). Greenhouses are agricultural buildings that consist of light metal structures covered with transparent plastic, with ventilation through the walls and ceiling, and diffuse solar radiation. These buildings maintain an adequate temperature and humidity allowing to extend the crops for almost the complete year (from the end of July to the beginning of June of the following year). However, these conditions are not the better for the wellbeing of the greenhouse workers, whose working period lasts practically the complete year, since maintenance work is also carried in non-crop periods (Pérez-Alonso et al., 2011; Callejón-Ferre et al., 2009, 2011b).

Despite greenhouses soften the outdoor climate environment, large variations in air temperature and humidity do still occur throughout the day. Humidity and specially air temperature are the main parameters that affect workers and crops inside of greenhouses (Vox et al., 2010; Zhao et al., 2001). In greenhouses of Almería, air temperature vary from around 50 °C in the middle of the day in summer to near 0 °C at night in winter.

Several authors (Callejón-Ferre et al., 2011a; Riemer & Bechar, 2016; Cecchini et al., 2010; Marucci et al., 2012; Diano et al., 2016; Okushima et al., 2001) have reported heat stress risk fundamentally during the warmer months (spring and summer). Environments with high temperatures and humidity can affect the safety of the workers, causing severe problems to the cardiovascular system and the thermoregulatory system of workers (Chad & Brown, 1995; Zhao et al., 2009). Moreover, these environments also have a negative impact in the productivity of workers. Additionally, Risk of cold in winter have been also pointed out (Callejón-Ferre et al., 2011a).

To assess the thermal environment and its influence to the workers, we need to follow several rules (Parsons, 2013). According to the International Standard Organization (ISO), the environment is classified in moderate or extreme. Depending on the category, a different index and ISO Standard must be used. To calculate these indexes, in any case, the measurement of several climatic parameters are required and in some cases also the metabolic rate of the activity carried out by the workers, based in ISO 8996 (ISO 8996:2004, 2004), and the clothing insulation and sweat rate, ISO 9920 (ISO 9920:2007, 2007). Moreover, the ISO 7726 Standard (ISO 7726:1998, 1998) defines the specifications and methods that must to be fulfilled to asses the thermal environment. The specifications address the expected parameters of measuring instruments such as measurement range, accuracy, and response time. Regarding the methods, physical magnitudes may vary with the space as much horizontally as vertically and the environment can be considered homogeneous or heterogeneous. An environment will be considered as homogeneous if the physical magnitude under consideration is practically uniform in the analysed area. On the other hand, an environment will be heterogeneous if there are significant variations in the physical magnitude. The limits for each climatic parameters that define the environment as heterogeneous or not, with respect that parameter, are established in the ISO 7726. In case of of heterogeneous environments, the rule states that the physical magnitudes

need to be measured at different points both horizontally and vertically. In the latter, ISO 7726 specifically
40 establishes three heights where the measurements must to be carried out: ankle, abdomen, and head.

Related to the thermal assessment inside a greenhouse and the heat stress in workers, only the work
presented by Marucci et al. (Marucci et al., 2012) comply with the requirements for the measuring instru-
ments described in the ISO 7726. However, these work only perform measurements in one position inside
the greenhouse and in one height. Recent work carried out by López et al. (López-Martínez et al., 2018),
45 fulfilling with ISO 7726, reveals heterogeneity conditions of the greenhouse analysed. In this work, twelve
measuring stations were distributed along the greenhouse, each one measuring climatic parameters at the
three heights specified by the rule. According to that results obtained, it is pointed out that greenhouses
are environment where the heterogeneity conditions can be achieved.

Others works, focused in the crop growth conditions, have shown large air temperatures differences in
50 vertical and also in horizontal direction inside greenhouses. Zhao et al. (Zhao et al., 2001), Soni et al. (Soni
et al., 2005) and Zorzeto et al. (Zorzeto & Leal, 2017) measured vertical differences of around 7°C, 10°C and
14°C, respectively. López et al. (López et al., 2013) and Kittas et al. (Kittas et al., 2003) obtained horizontal
differences of around 6°C and 8°C, respectively. In simulations with computational fluids dynamics (CFD),
large variations of temperature inside the greenhouse have been also observed: Molina-Aiz et al. (Molina-Aiz
55 et al., 2004) obtained variations of temperature of around 9°C in a similar greenhouse and in a location
very close to the greenhouse studied in this work, and Tong et al. (Tong et al., 2009) obtained variations
of temperature as large as 12°C. All these results also suggest that greenhouses may be heterogeneous
environments when are evaluated according the ISO 7726.

To carry out the measurements inside of a greenhouse at different points at the same time, a sensor
60 network is required. In recent years, Wireless Sensor Networks (WSNs) have been used to carry out mea-
surements in different points. This type of networks are composed of battery-powered nodes provided with
sensors that supply the corresponding information in real time and transmit it to a central base-station (BS)
where it will be stored and from where nodes can be monitored and controlled (Ferentinos et al., 2017).
The main advantages of WSN are the capability of measuring multiple points avoiding the use of wires,
65 which are usually damaged and wore out when exposed to aggressive environment (high variations of air
temperature and humidity) and could hinder the cultivation practices. Furthermore, thanks to the advances
in electronics and wireless communications, it is possible to develop WSNs with a low cost and low energy
consumption.

In the present work we have used a WSN to overcome the scarcity of real measured air temperature
70 data inside a greenhouse during a complete year, also allowing us to assess whether air temperature is
heterogeneous or not (according to ISO 7726) inside a typical greenhouse. This work is a continuation of
our previous one (López-Martínez et al., 2018), in which the WSN and twelve measurement stations where
designed and put into operation in a greenhouse. The present work carries out a measurement campaign

during a complete year with the objective of evaluating the heterogeneous conditions of a greenhouse with respect to the air temperature.

To sum up, the aim of the present work is twofold:

- Monitoring, using a WSN, the air temperature distribution inside a typical greenhouse during a complete year, at three different heights and multiple points equally distributed horizontally. These data will allow to characterize the air temperature distribution of the greenhouse and its variations along the four seasons of the year.
- To study the air temperature heterogeneity inside a typical greenhouse according to ISO 7726 and providing some recommendations for the assessing of the thermal environment of a greenhouse.

This paper is organized as follows: initially, the material and methods are explained in Section 2. The experimental results and their discussion are detailed in Section 3. Finally, we outline some conclusions in Section 4.

2. Material and Methods

2.1. Experimental setup

The experiment was carried out in a greenhouse located at 15 km east of Almería ($36^{\circ}52' N - 2^{\circ}17'255 W$ and 98 m above sea level), in the southeastern Spain. The experimental campaign was performed during a complete year, since December 2016 to November 2017 and the time between measurements was 30 seconds. The greenhouse is “raspa y amagado” type, the most common in this region. Its surface area is $1024 m^2$ ($32 \times 32 m$) and the heights of the gutter and ridge are 3.4 m and 4.1 m, respectively. The drawing of the greenhouse is defined in Figure 1. The structure is made of steel and is covered by three polyethylene layers of $200 \mu m$, with 81% visible light transmittance and 29% diffuse light transmittance. Ventilation is natural through lateral windows and roof vents. Inside the greenhouse, the soil is covered of gravel and sand, and tomato plants are cultivated.

The implemented WSN comprises 12 measurement stations distributed inside the greenhouse (Figure 1). Each station consists of a structure with three heights where the sensors are installed. Air temperature (ta), globe temperature (tg), relative air humidity (RH) and air velocity (v_a) have been measured at the three heights, while UVI ultraviolet radiation (UVI) is measured only at the higher height of each station. Therefore, the measurement stations are composed by four probes for each height (to measure air temperature, globe temperature, relative air humidity, and air velocity) and a UVI probe located at the top height, as it can be seen in Figure 2. The heights were selected at 0.23 m, 0.93 m and 1.56 m according to the 50th percentile of Spanish population (Carmona-Benjumea, 2001). The characteristics of

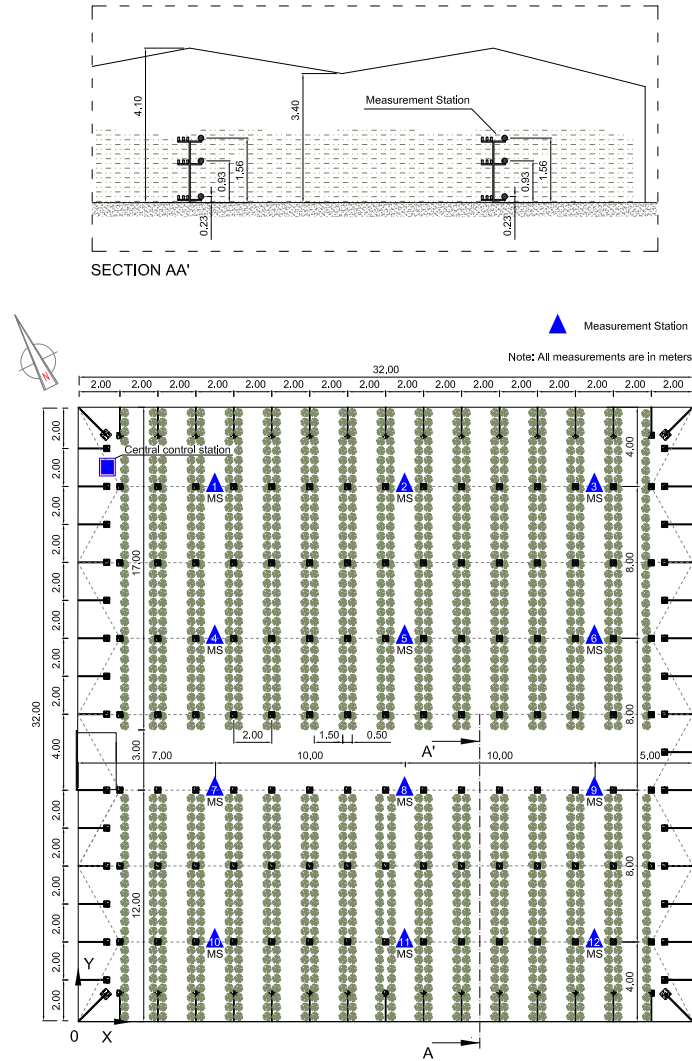


Figure 1: Drawing of the greenhouse, where also are defined the locations of the measurement stations.

105 the measuring instruments fulfil with the specifications defined in ISO 7726 (except for UVI measurement that is not considered in the standard) and are presented in Table 1.

These climatic parameters have been measured using a WSN that employs IEEE 802.15.4 and ZigBee as communication protocol, and a smartphone to transmit the data by 4G to a server installed in the Data Processing Centre of the University of Almería (CPD-UAL) enabling access to these data by a web interface
 110 (HTTP) or by safe Secure Shell (SSH) links. Mesh topology is used (where nodes are connected directly to each other for peer-to-peer communication) at the communication low level, but it is modified by firmware and software so that communication follows a logical tree, generating routing tables which can be changed at any time via the Internet. Network architecture is explained in detail in (López-Martínez et al., 2018).

Table 2 summarizes some related works regarding the use of WSNs (Pérez-Alonso et al., 2011; Marucci

Climatic parameter	Measurement range	Accuracy	Model and manufacturer
Air temperature (ta)	$-15^{\circ}C$ to $250^{\circ}C$	$\pm 0.06^{\circ}C$ at $0^{\circ}C$	Pt-100 515-725 (TC Direct)
Globe temperature (tg)	$-15^{\circ}C$ to $250^{\circ}C$	$\pm 0.06^{\circ}C$ at $0^{\circ}C$	Pt-100 515-725 (TC Direct)
Relative air humidity (RH)	0 to 100% HR	$\pm 3\%$ HR	Si7021-A20 (Silicon Labs)
Air velocity (v_a)	0.05 to 20 $m \cdot s^{-1}$	$\pm 10\%$	Rev. C (Modern Device)
UVI	0 to 15	± 1	Si1145/46/47 (Silicon Labs)

Table 1: Characteristics of the measuring instruments used.



Figure 2: One of the 12 measurement stations located inside the greenhouse.

115 et al., 2012; Zorzeto & Leal, 2017; Molina-Aiz et al., 2004; Ferentinos et al., 2017; Balendonck et al., 2014;
Vox et al., 2014; López et al., 2012; Srbinovska et al., 2015; Bojacá et al., 2009; Kittas et al., 2008). The
communication protocol used for most of them, and also in our present work, is IEEE 802.15.4 plus ZigBee.
Regarding the network topology, some works (Ferentinos et al., 2017; Balendonck et al., 2014; Srbinovska
et al., 2015) use a star topology (comprising a central node connected to all the sensing nodes) while others
120 (Vox et al., 2014) use a tree topology (comprising a central node connected to the sensing nodes without
loops).

Table 2: Summary of related works regarding the use of WSNs.

Work	Application	Stations			ISO 7726 application	Measurement campaign	Time between measurements	Accuracy/range of measurement instruments			
		Configuration (horizontal x vertical)	Heights (meters)	Total measurements				Air temperature	Globe temperature	Relative humidity	Others
Balendonck et al. (2014)	Horizontal climatic heterogeneity and crop growth	100x1	Different at each trial	100	No	60 days (10 for each trial)	1 min.	SHT71 (±0.4 °C)		SHT71 ±5% RH	-
Bojacá et al. (2009)	Effect of temperature distribution on the crop growth	25x1	1.5	25	No	28 days	6 min.	±0.01 °C			Solar radiation
Ferentinos et al. (2017)	Climatic heterogeneity and crop growth	5x1	1.8	1	No	4 months (3 different trials)	30 sec.	SHT75 (±0.3 °C)		SHT75 ±2% RH	Solar radiation
Kittas et al. (2008)	Impact of insect screens and ventilation openings on the greenhouse climate	24x2 + 12x1 + 12x1	1.1-2 + 1.1 + 2.85	72	No	2 months (during 10-17h)	5 min.	±0.1 °C		±2%	Air velocity, solar radiation, vapor pressure
López et al. (2012)	Characterize airflow and temperature distribution of greenhouses	12x2	1-2	24	No	-	-	±0.18 °C		±2.5%	Air velocity
Marucci et al. (2012)	Thermal stress by workers employed in vegetable grafting	1x1	1.5	1	Yes	10 months	-	Pt-100 1/3 DIN (±0.13 °C)	Pt-100 1/3 DIN (±0.13 °C)	±2%	Air velocity, damp bulb temperature, partial vapor pressure
Molina-Aiz et al. (2004)	Influence of wind speed on the ventilation performance	4x3 + 1x6 + 6ground + 10top + 4windows	0.5-1.5-2.5 + 0.5-1-1.5-2-2.5-3 + ground + top + windows	38	No	4 days (during different periods of time)	30 sec.	NTC (±0.4 °C)		±3% RH	Air velocity, solar radiation
Perez-Alonso et al. (2011)	Thermal stress in the greenhouse construction	12x1	-	12	No	4 months	5 min.	Pt-100 Class A (±0.25 °C)	Pt-100 1/3 DIN (±0.13 °C)	±2.5%	Dry air temperature, air velocity, solar radiation
Srbínovska et al. (2015)	Crop growth	5x1	-	5	No	7 days	30 min.	SHT11 (±0.5 °C)		SHT11 ±3% RH	
Vox et al. (2014)	Crop growth	2x1	-	2	No	20 days	60 sec.	SHT75 (±0.4 °C)		SHT75 ±2% RH	Air pressure, solar radiation
Zorzeto et al. (2017)	Vertical and horizontal climatic heterogeneity with evaporative cooling	21x2 + 3x1	1.2-2.4 + 4.5	45	No	30 days (3 different trials)	30 sec.	SHT75 (±0.4 °C)		SHT75 ±2% RH	Air velocity
López-Martínez et al. (2018) and this work	Thermal stress and climatic heterogeneity	13x3	0.23-0.93-1.56	39	Yes	1 year (01/12/16 - 31/11/17)	30 sec.	Pt-100 1/10 DIN (±0.07 °C)	Pt-100 1/3 DIN (±0.07 °C)	±3% RH	Air velocity, UVI

2.2. ISO 7726 complying and heterogeneity assessment

The Standard ISO 7726 defines the basic physical magnitudes associated to the study of the thermal environment: air temperature (ta), mean radiant temperature (\overline{tr}), absolute air humidity (AH , expressed by the partial vapour pressure) and air velocity (v_a). An approximate value of mean radiant temperature can be obtained by measuring globe temperature (tg) and other basic parameters such as air temperature and air velocity. Globe temperature combines the effects of radiation, air temperature and air velocity and is measured by means of a black sphere with a temperature sensor at its centre. Thus, considering this method for calculating mean radiant temperature, the climate parameters that must be measured to assess the thermal environment are: air temperature (ta), globe temperature (tg), absolute air humidity (AH), and air velocity (v_a). By means of these parameters, other parameters required to obtain different thermal stress indices can be calculated, as operative temperature (t_o) for PMV index (ISO 7730:2005, 2005) and natural wet-bulb temperature (t_{nw}) for WTGB index (ISO 7243:2017, 2017).

ISO 7726 also defines the specifications relatives to the spatial variation of physical magnitudes, which are different depending on the type of environment considered (comfort-class C or heat stress-class S). In this work heat stress is possible, so class S environment is selected. One of the specifications is three heights where physical magnitudes must to be measured in the case that environment is heterogeneous, corresponding to ankle, abdomen and head. To consider a thermal environment as heterogeneous, any parameter considered as basic for the ISO 7726 (air temperature, mean radiant temperature, air velocity or partial vapour pressure) must be out of a limit with respect to its mean value. The limits that define a heterogeneous environment are summarized in table 3. To calculate the mean value of each basic parameter weighting factors must be applied to each measurement height, being 1 for ankle and head, and 2 for abdomen.

Basic parameters	Range (respect to mean value)
Air temperature (ta)	$\pm 2^\circ C$ ($0^\circ C - 50^\circ C$)
Mean radiant temperature (\overline{tr})	$\pm 10^\circ C$ ($0^\circ C - 50^\circ C$)
Air velocity (v_a)	$\pm (0.3 + 0.15 \cdot v_a) m \cdot s^{-1}$
Partial vapour pressure (P_a)	$\pm 0.45 kPa$

Table 3: Thresholds from which the environment is considered heterogeneous.

Despite there are four basic parameters and any of them show variations along the greenhouse, previous results of López et al. (López-Martínez et al., 2018) suggest that the air temperature is the climatic parameter that may show larger variations. In fact, no mean radiant temperature heterogeneity was found in the period studied. In addition, air temperature may be the parameter with more influence over workers in the greenhouse. According to this, the present work has been focused in the air temperature variations.

Additionally, ultraviolet radiation Index (*UVI*) also has been measured to determine the presence of clouds. In total, more than two million of measurements have been studied in the year analysed from the 36 points of measurement (12 stations by 3 heights).

As described before, to consider an environment as heterogeneous, some measurement must be out of the range specified respect to the weighted mean value of all the measurements (of all the measurement stations). In this case for air temperature, the range defined in ISO 7726 is ± 2 °C. The time when no value is out of this range, the environment is considered as homogeneous. To assess heterogeneity, first, mean value and heterogeneity limits are calculated. For horizontal heterogeneity, the weighted mean of the 3 heights per each measurement station is calculated, resulting 12 values for each instant of time. These values are compared with the heterogeneity limits and if one of them exceeds the limits, horizontal heterogeneity exists. On the other hand, for vertical heterogeneity, the mean of the 12 measurement stations per each height is calculated, resulting 3 values for each instant of time, which are compared with respect the mean value in the same way that horizontal heterogeneity. The heterogeneity conditions of the greenhouse has been evaluated along a complete year, comparing the differences between the four seasons of the year.

2.3. Considerations and study limitations

An aspect to take into account for the results interpretation is that data have been analysed using time in UTC (Coordinated Universal Time). Local time in Almería is CET (Central European Time) with daylight saving time in summer.

Greenhouses environment is peculiar since it cannot be classified as indoors due to the existence of diffuse solar radiation, low wind speed, and high humidity. In addition, plastic covers are not fully waterproof and dusk and calcium carbonate (coming from paint the covers with whitewash) are present in the environment. Measurement stations have been exposed to these difficult operation conditions, making necessary weekly visits to clean and maintenances tasks. This facts have caused the loss of measurements of some station during short periods of time, specially during holiday periods.

3. Results and discussion

First, the results of the air temperature measurement campaign inside the greenhouse are presented and distribution of air temperature is analysed. Next, air temperature heterogeneity in the greenhouse, according to ISO 7726, is assessed during a complete year both horizontally and vertically. Finally, from the results obtained, some recommendations are exposed for assessing air temperature heterogeneity of the thermal environment in a greenhouse.

3.1. Variation of air temperature

Next we summarize the measurements of air temperature carried out during the experimental campaign. In table 4, minimum and maximum values of air temperature for each month are gathered. As it is logical, its minimum values are measured at dawn and maximum values at midday. The maximum value for air temperature took place in August and is 55 °C, whereas the minimum value were measured in January is around 1 °C. It is striking that the vast majority of the maximum and minimum values were measured at the height 3 or top height of the measurement stations. This trend could be observed in Figure 3, where the weighted mean of the measurements of each height for a day is represented (in this case January, 30th 2017). Temperature in height 3 is higher than the rest of heights during the day, but at night height 1 is the highest, whereas height 3 is the lowest.

	Air temperature (°C)	
	Min.	Max.
December 2016	3.9	34.0
January 2017	1.1	36.2
February 2017	2.3	37.5
March 2017	3.9	41.7
April 2017	6.5	41.7
May 2017	8.9	44.1
June 2017	14.0	53.6
July 2017	12.4	54.5
August 2017	18.8	55.0
September 2017	13.2	44.8
October 2017	10.6	41.9
November 2017	4.4	36.3

Table 4: Minimum and maximum values of air temperature measured at any point of the greenhouse for each month.

It has been calculated the mean air temperature per seasons in each instant using the weighting factors for heights defined in ISO 7726, obtaining a average day per season. This is shown in Figure 4, together with the standard deviation. As expected, in summer and winter air temperature inside the greenhouse is the highest and lowest, respectively. In spring it can be observed that the temperature is higher than autumn in the middle of the day whereas at night the temperature is a bit lower. Standard deviation is higher in the middle of the day than at night for all the seasons. In addition, standard deviation also seems to increase with air temperature as it is higher in warmer seasons.

Videos with a 3D representation of data showing how air temperature varies during the day have been included in this work ¹. In Figure 5, a capture of a determined instant of the video is shown for air

¹See: https://www.youtube.com/playlist?list=PLguxjVND_tkzeqU0prXUZXXzix9ZNIIsyu

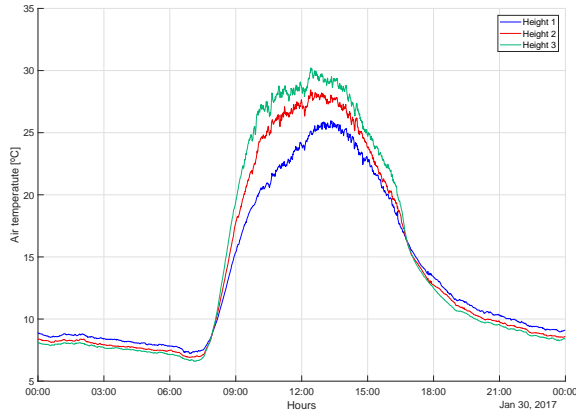


Figure 3: Mean air temperature for each height on January, 30th 2017.

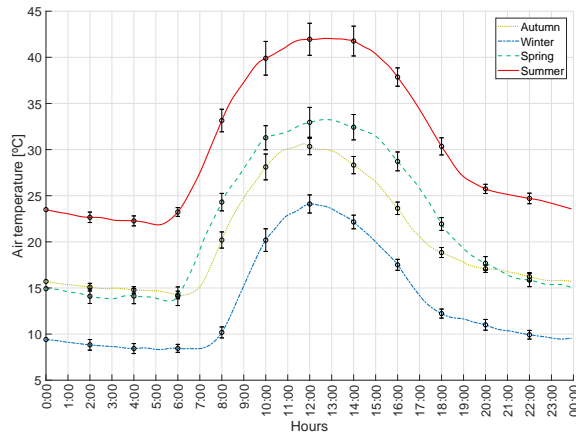


Figure 4: Average day and confident intervals ($\pm 1\sigma$) of mean air temperature per season.

temperature. All the measurements recorded by the measurement stations are represented in the videos, that is 36 measurements (12 stations by 3 heights). The four images of figure 5 are different views of the same time. Each measurement is represented by a blue marker and for each station, a label of the weighted mean value of this station is shown at the top of these markers. In a scale of colours, the weighted mean air temperature of each station also is visualized at the bottom of the z-axis. Markov Random Fields (MRF) has been used to interpolate the rest of points of the scale colour inside the greenhouse. It should be noted that the the two images on the left have a scale of colours indicated in the bottom-left image and it is different to the two images on the right which have a scale of colours specified in the bottom-right image. At the bottom right, another valuable information is provided by the videos: the overall minimum and maximum values, and the maximum temperature difference among all the sensors installed. In addition, it is provided the partial minimum values, maximum values and maximum temperature differences for each of the three

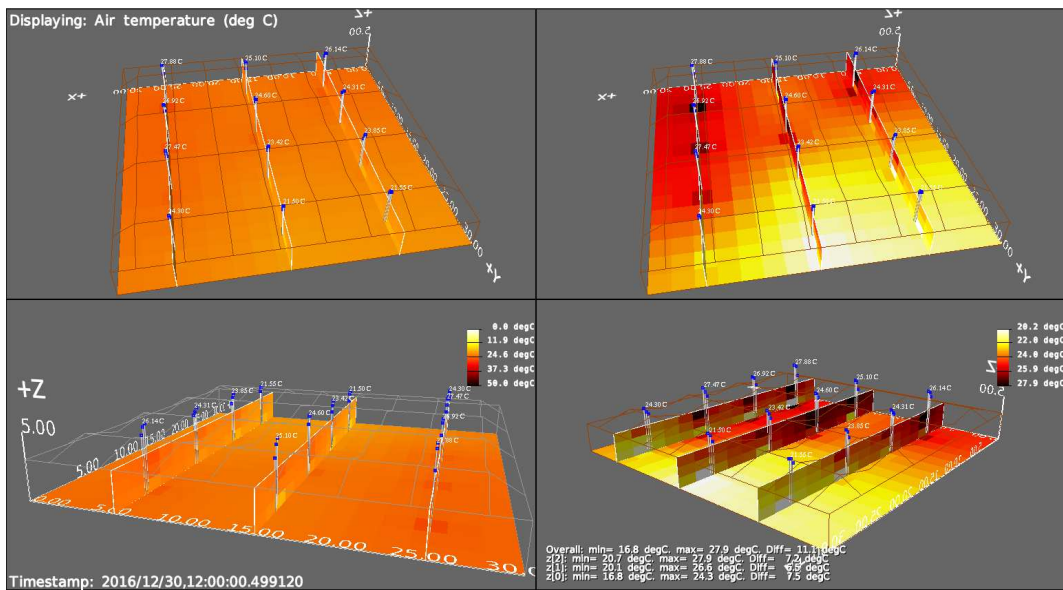


Figure 5: Air temperature distribution inside the greenhouse (four different views). Image capture of the 3D video at 12:00, 30th Dec 2016.

heights measured (that correspond to ankle, abdomen and head).

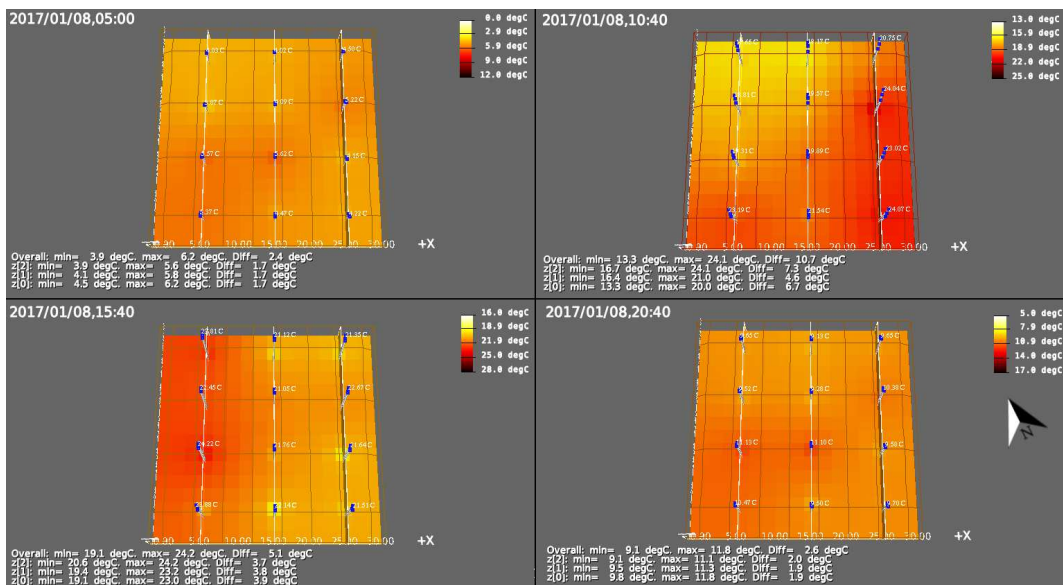


Figure 6: Air temperature distribution inside the greenhouse at four different moments along the a day: 5:00 a.m, 10:40 a.m, 15:40 a.m and 20:40 a.m.

Finally, from the 3D videos, air temperature distribution inside the greenhouse is studied horizontally in different periods of the day. In Figure 6, a top view of the greenhouse for four different moments of a day (January, 8th 2017) has been represented. At night (5:00 UTC), there is few difference of temperature

(around 2.5°C) and the west side of the greenhouse is a bit warmer. In the morning (10:40 UTC), the southeast side of the greenhouse is heated by the sun and consequently is warmer than the rest. Temperature variations are high reaching near 11°C . In the early afternoon (15:40 UTC), temperature distribution changes due to the position of the sun and temperature differences decrease. The southeast side of the greenhouse gets cold at the same time that the west side gets hot. At 20:40 UTC, sun has gone down and variations of temperature are low as at 5:00 and as is usual at night. Results show that the patterns are similar in the rest of days of the year. When sun rays strike in the walls and lateral windows (where there is not plastic cover), it heats this side of the greenhouse producing higher temperature differences respect other areas in the greenhouse. Therefore, distribution of temperature inside the greenhouse is influenced by the position of the sun. Variations of temperature are high at midday and decrease as approach to night. In a nearby location and the same type of greenhouse, CFD simulations of Molina-Aiz et al. (Molina-Aiz et al., 2004) obtained variations of temperature close to these: 15°C at 14:30 (July, 16th 2003), 5.3°C at 19:30 (April, 18th 2003) and 4.8°C at 20:15 (July, 13th 2003). It should be noted that this greenhouse has a larger area than ours and temperature variations could be a bit higher for that reason.

3.2. Assess of air temperature homogeneity

First, it has been studied the quantity of heterogeneous days per month and also per season (Figures from 7 to 10). So that, each day has been classified in one of the three categories: heterogeneous for more than 3 hours, heterogeneous from 30 minutes to 3 hours and homogeneous, where days with very shorts period of heterogeneity (less than 30 minutes of heterogeneity) have also been included in the group of homogeneous days. The intervals of categories have been defined in this way to avoid considering a day heterogeneous with very few time or some "peaks" of heterogeneity and to difference between days with low or high heterogeneity.

Figures 7 and 8 represent the percentage of heterogeneous and homogeneous days per each month. Figure 7 shows horizontal heterogeneity, where the heterogeneity (in some of the two categories of heterogeneity) is greater than 60% in all the months. In all the year, more than 80% of days are heterogeneous.

Similarly, Figure 8 shows the vertical heterogeneity per months. It must be highlighted that the greenhouse is much more heterogeneous horizontally than vertically as it can be seen from the figures. In addition, when the environment is heterogeneous vertically, it is for less time than horizontally. Around 49% of the days are heterogeneous vertically in the complete year.

Figures 9 and 10 shows the percentage of heterogeneous and homogeneous days, but in this case per season. In Figure 9 the percentage of horizontal heterogeneous and homogeneous days per season is plotted. In winter and summer there is a higher percentage of homogeneous days than in autumn and spring.

In the same way, the percentage of vertical heterogeneous and homogeneous days is shown in Figure 10. In this case, it seems that heterogeneity is concentrated in cold seasons (winter and autumn) whereas in

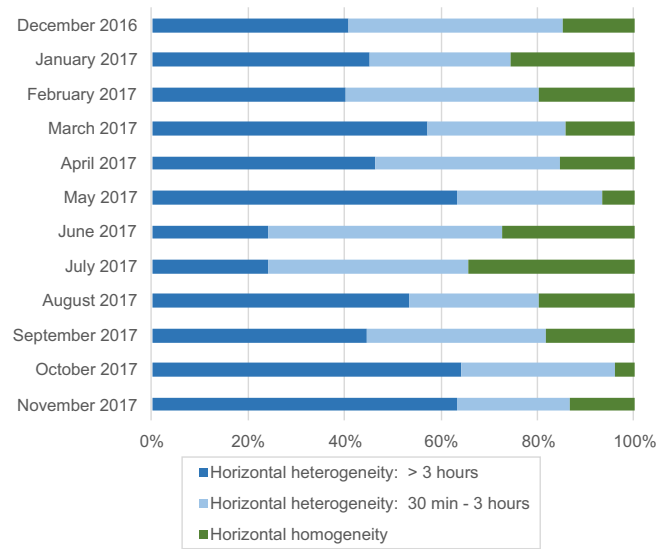


Figure 7: Percentage of horizontal heterogeneous days per months.

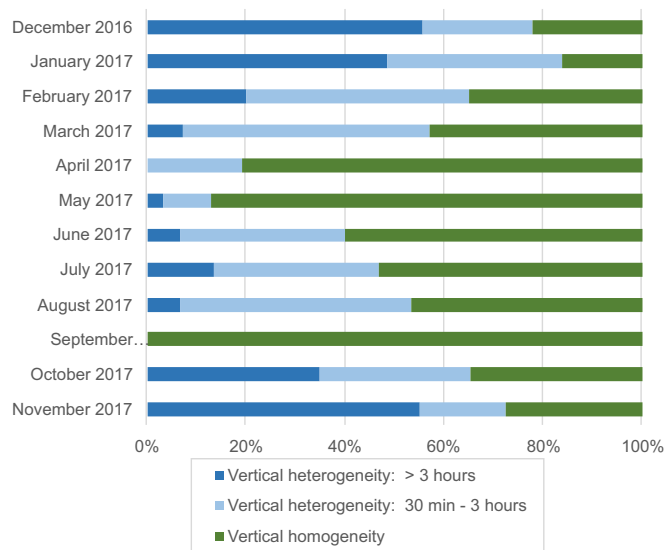


Figure 8: Percentage of vertical heterogeneous days per months.

spring and summer there is a big quantity of homogeneous days.

Regarding the climatic conditions that favour the presence of heterogeneity, it has been observed a great influence of the clouds in the air temperature distribution inside the greenhouse. Thus, respect to the total horizontal homogeneous days (which were around 55), 75% of them correspond to cloudy days. On the other hand, only 33% of the heterogeneous days are cloudy. In the case of vertical homogeneity, 64% of the total homogeneous days (around 153) were cloudy. The percentage of cloudy days in the total heterogeneous days

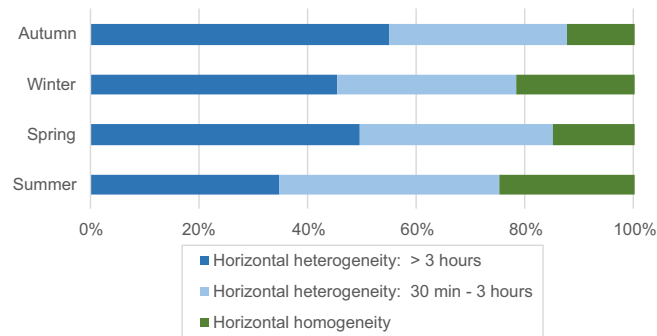


Figure 9: Percentage of horizontal heterogeneous days per seasons.

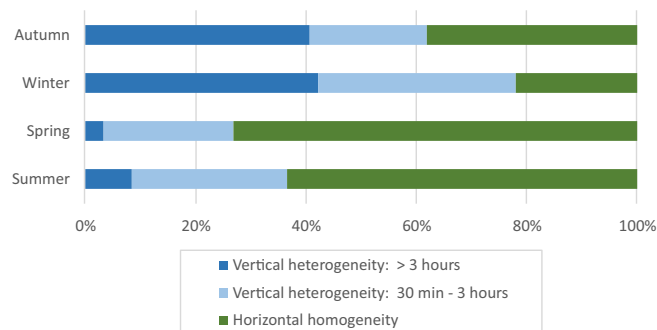


Figure 10: Percentage of vertical heterogeneous days per seasons.

is only 16%. An example of this behaviour can be observed in Figure 11, where horizontal heterogeneity, vertical heterogeneity and UVI are represented for two consecutive days (January, 27th and 28th 2017). In the graph of horizontal heterogeneity, the weighted mean air temperature of each measurement station is plotted in colour lines. The mean value of the 12 measurement stations is plotted in continuous black line, while discontinuous lines are the homogeneity limits. It can be observed that the cloudy day is totally homogeneous whereas in the sunny day some of the measurements station surpass the homogeneity limits at midday when UVI is high. In the graph that shows the vertical heterogeneity, the mean value for each height are represented in colour lines, while the weighted mean value and the homogeneity limits are plotted in continuous and discontinuous black lines respectively. As for the horizontal case, cloudy day remains homogeneous along the day, while the sunny day shows heterogeneity conditions.

Next, it has studied the periods of the day when heterogeneity is produced. In order to do it, it has been obtained the percentage of heterogeneous days (with respect to the total days of each seasons) but evaluated at every moment of time throughout the day. Heterogeneity, both vertical and horizontal, is produced in the central hours of the day and never at night. Figure 12 shows the results for horizontal heterogeneity. Between 9 and 15 hours are concentrated the greater percentages of heterogeneous days and it can also be

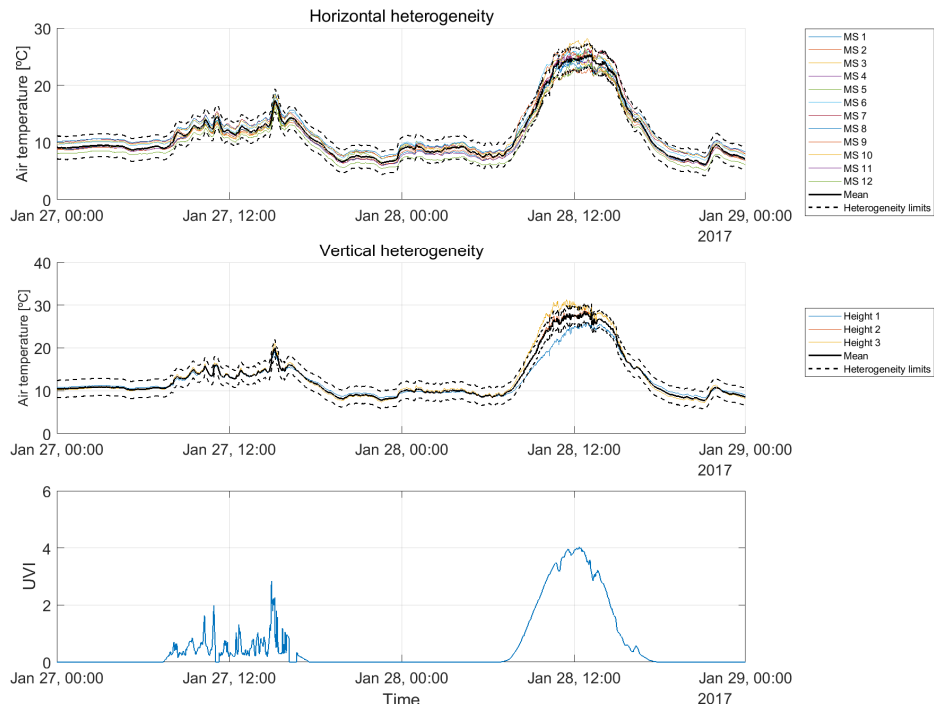


Figure 11: Horizontal heterogeneity, vertical heterogeneity and UVI for two consecutive days (January, 27th and 28th 2017), the first one cloudy and the second one sunny.

observed that from 19 to 7 hours the environment in the greenhouse is homogeneous. As in Figure 9, spring and autumn are more heterogeneous horizontally than winter and summer.

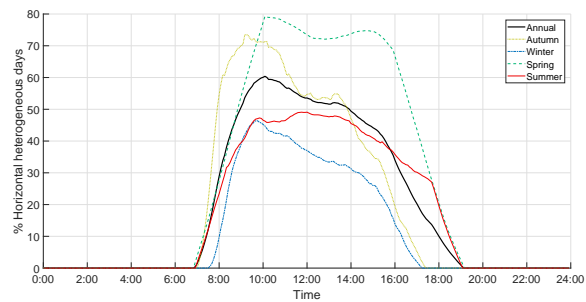


Figure 12: Percentage of horizontal heterogeneous days at every moment of time throughout the day.

In like manner, Figure 13 shows the periods of the day when vertical heterogeneity occurs. In this case, the greenhouse is homogeneous approximately from 17 to 7 hour. The period of heterogeneity is concentrated in less time and with lower percentages than horizontal heterogeneity. Winter and autumn (the coldest seasons) are more heterogeneous vertically than winter and summer as it can also be seen in Figure 10. It must be highlighted that winter is the less horizontal heterogeneous season, but results to be

the most heterogeneous vertically. Inversely occurs with spring, that is the most horizontal heterogeneous season and the less heterogeneous vertically.

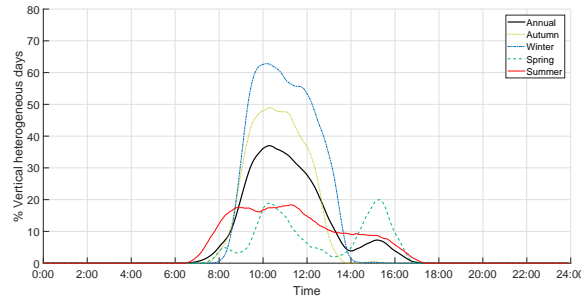


Figure 13: Percentage of vertical heterogeneous days at every moment of time throughout the day.

For all the seasons except spring the shape of the curves are more or less similar both for horizontal heterogeneity and for vertical heterogeneity, increasing the percentage of heterogeneity until the maximum value was reached and from this point they decreased gradually until homogeneity is reached. However, in spring it can be observed that when the maximum value is reached, the percentage decreases but later increases again until finally decreases, producing a kind of valley in the shape of the curve around 13 hours.

In Figures 12 and 13 also can be observed that heterogeneity lasts more time in seasons in which the day is longer as spring and summer. Therefore, it can be affirmed that heterogeneity depends on the sun hours during a day.

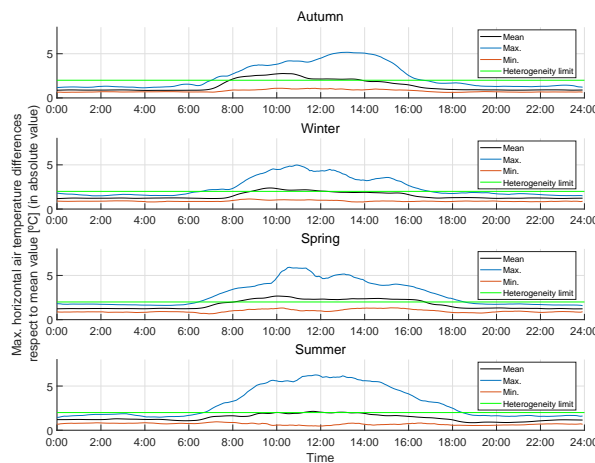


Figure 14: Maximum horizontal air temperatures differences respect to mean value, in absolute value.

Finally, to evaluate quantitatively the heterogeneity, maximum air temperature differences respect to the mean value (in absolute value) and overall maximum air temperature differences inside the greenhouse have been obtained for all the days in the complete year. For each instant of time, it have been calculated

the mean, maximum and minimum values of these maximum air temperature differences for all the days of each season. This values have been plotted and compared in Figures from 14 to 17. Figure 14 shows the maximum horizontal air temperature differences respect to mean value, in absolute value. The mean of these values exceed the heterogeneity limit for all the seasons, and the maximum value occurs in summer with a difference of 6.3 °C.

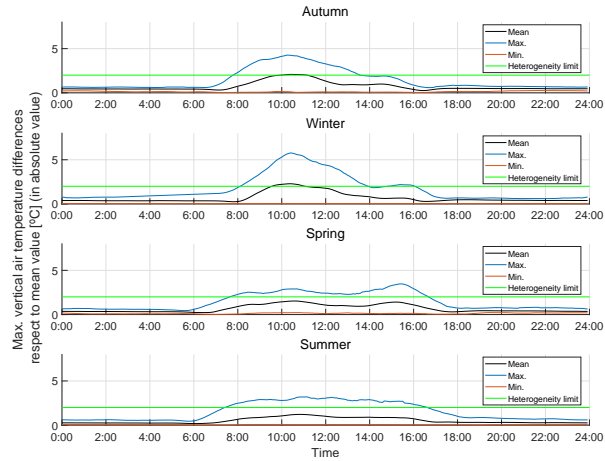


Figure 15: Maximum vertical air temperatures differences respect to mean value, in absolute value.

In Figure 15 the maximum vertical air temperature differences respect to mean value are shown, in absolute value. In this case, the mean of these values is lower than for horizontal heterogeneity and only exceed the heterogeneity limit for autumn and winter, justly in the seasons when there is more percentage of vertical heterogeneity. The maximum value takes place in winter (5.8 °C). It also can be observed that minimum values for vertical heterogeneity are close to 0 °C of difference and lower than for horizontal heterogeneity. It was seen before in Figures 12 and 13 that heterogeneity occurs during the day and never at night, confirming in Figure 14 and 15 that the maximum air temperature difference never exceeds the heterogeneity limit.

Figures 16 and 17 represent the maximum horizontal and vertical air temperature differences, respectively. For horizontal heterogeneity, the mean values reach around 4 °C in all the seasons and the maximum value occurs in spring with a value of 8.4 °C.

For vertical heterogeneity, it can be observed that the mean value is higher in autumn and winter, reaching values close to 4 °C while in spring and summer the mean value reaches around 2 °C. Something similar occurs for the maximum values, which are higher in autumn and spring, reaching up to 10.6 °C in winter. The minimum values for vertical heterogeneity are lower than for horizontal heterogeneity, in like manner that for the maximum air temperature differences respect to mean value (Figures 14 and 15).

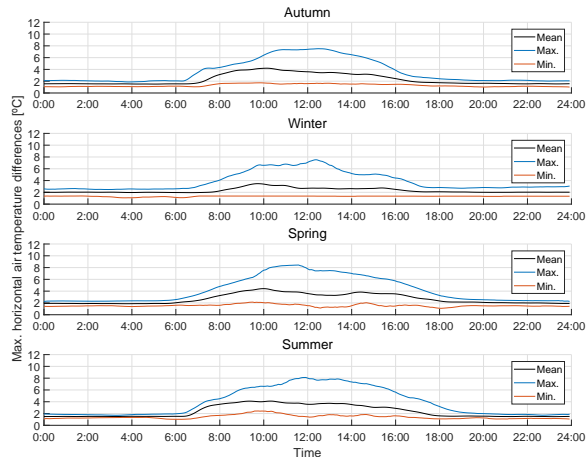


Figure 16: Maximum horizontal air temperatures differences.

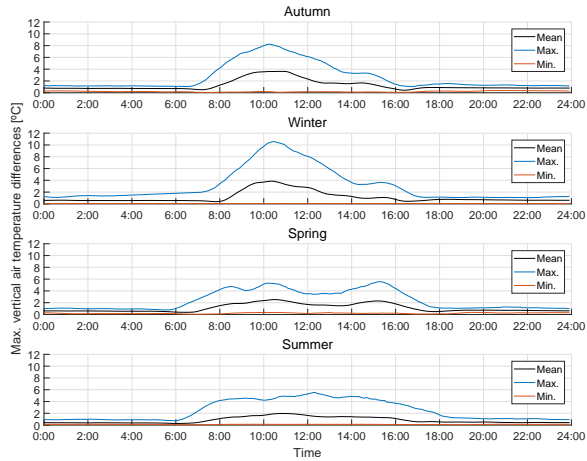


Figure 17: Maximum vertical air temperatures differences.

3.3. Recommendations for assessing the thermal environment inside greenhouses

Based on the results discussed above, the authors of this work propose the following recommendations
 310 for assessing the thermal environment inside a greenhouse:

- Any greenhouse will probably be a heterogeneous environment with respect to the air temperature according to the ISO 7726 Standard. Therefore, measurements must be taken at different locations, both horizontally and vertically, to assess the horizontal and vertical heterogeneity, respectively.
- Whether the environment must be considered heterogeneous or not is a condition that changes along
 315 the day. Larger air temperature differences usually take place at the central hours of the day, which also correspond with the highest values of air temperature. Therefore, it is recommended to include this period of time in the measuring schedule. Besides this, the work schedule of workers must be,

obviously, also considered when designing the measurement schedule.

- The presence of clouds is a critical factor for the air temperature distribution inside the greenhouse. Cloudy days favour homogeneity, while also softening temperature values. Therefore, measurements should be scheduled preferably during sunny days.
- According to the ISO 7726, measurements must be taken at three heights (ankle, abdomen, and head) to evaluate the vertical heterogeneity. Regarding the horizontal heterogeneity, the Standard does not provide recommendations about the number of points or the places where measuring stations must be placed. The results obtained in the present work shows that the horizontal air distribution is conditioned by the azimuth and elevation of the sun. North-South and East-West air temperature differences have been observed along the greenhouse. Accordingly, at least four measurement points distributed with respect the Cardinal points are recommended.
- Greenhouse thermal conditions inside greenhouses are not controlled and show large variations along the year. For a complete evaluation of the heat stress or cold risk, the study should be extended along a complete year. Results provided in this work may be useful to select the most appropriate periods to evaluate the heat stress risk.
- Regarding the WSN used to gather the measurements, it is strongly recommended to place radio antennas at a height high enough to avoid the loss of line of sight between antenna pairs for each transmission link, taking into account the over-the-year growth of the crop. This becomes particularly important for radio bands in the GHz range, due to the strong absorption (attenuation) of radio waves by living (wet) plants.

4. Conclusion

This work has been focused on studying the air temperature distribution and its heterogeneity conditions through a complete year. The results provide experimental measurements for a typical greenhouse during a complete year, in an area where agriculture under plastic have a great influence in the economy and is an important source of employment. Until now, there is no deep study on the thermal conditions and risk of heat stress of the greenhouse workers that meets with ISO 7726 requirements. The measurements together with the measuring instruments used in the present work meet with the requirements and methods gathered in ISO 7726 to study the thermal environments. Therefore, the results obtained of air temperature distribution and heterogeneity conditions can be useful for further studies of the heat stress risk of workers.

Heterogeneity has been confirmed for large periods of time, in both vertical and horizontal directions. The study reveals that the environment is more heterogeneous horizontally than vertically. Besides, winter and summer are more homogeneous horizontally than autumn and spring whereas vertical heterogeneity

350 is concentrated in cold seasons. Globally, Periods of time during the day of horizontal heterogeneity are greater than of vertical heterogeneity. It has been also observed a big influence of clouds in horizontal and vertical homogeneous days, with most cloudy days correlating with homogeneous days. Air temperature heterogeneity fundamentally depends on the sun, with heterogeneity happening in the central hours of the day and never at night. Also, the differences of temperature along the greenhouse has been observed in
355 West-East and North-South direction according with the sun movement.

Finally, based on the results obtained some recommendations are presented for assessing the thermal environment of greenhouses.

Acknowledgment

The authors would like to thank to Research Contract Number 401251 of University of Almería for
360 financing this study. Also to Laboratory-Observatory Andalusian Working Conditions in the Agricultural Sector (LASA), and to D. José Atienza Piedra and D. José Antonio López Martínez.

References

- Balendonck, J., Sapounas, A. A., Kempkes, F., Van Os, E. A., Van Der Schoor, R., Van Tuijl, B. A. J., & Keizer, L. C. P. (2014). Using a wireless sensor network to determine climate heterogeneity of a greenhouse environment. *Acta Horticulturae*, 1037, 539–546. doi:10.17660/ActaHortic.2014.1037.67.
- 365 Bojacá, C. R., Gil, R., & Cooman, A. (2009). Use of geostatistical and crop growth modelling to assess the variability of greenhouse tomato yield caused by spatial temperature variations. *Computers and electronics in agriculture*, 65, 219–227. doi:10.1016/j.compag.2008.10.001.
- Cabrera, A., Uclés, D., & Agüera, T. (2016). *Informes y Monografías / Análisis de la campaña hortofrutícola de Almería 2015/2016 [Reports and monographs/ Analysis of the fruit and vegetable sector of Almería 2015/2016]*. Almería, España. Fundación Cajamar. URL: <http://www.publicacionescajamar.es/pdf/series-tematicas/informes-coyuntura-analisis-de-campana/analisis-de-la-campana-hortofruticola-17.pdf> (accessed 2018-02-26).
- 370 Callejón-Ferre, A. J., Manzano-Agugliaro, F., Díaz-Pérez, M., & Carreño-Sánchez, J. (2011a). Improving the climate safety of workers in Almería-type greenhouses in Spain by predicting the periods when they are most likely to suffer thermal stress. *Applied ergonomics*, 42, 391–396. doi:10.1016/j.apergo.2010.08.014.
- Callejón-Ferre, A. J., Pérez-Alonso, J., Carreño-Ortega, A., & Velázquez-Martí, B. (2011b). Indices of ergonomic-psychosociological workplace quality in the greenhouses of Almería (Spain): Crops of cucumbers, peppers, aubergines and melons. *Safety Science*, 49, 746–750. doi:10.1016/j.ssci.2010.12.009.
- 375 Callejón-Ferre, A. J., Pérez-Alonso, J., Sánchez-Hermosilla, J., & Carreño-Ortega, A. (2009). Ergonomics and psychosociological quality indexes in greenhouses, Almería (Spain). *Spanish Journal of Agricultural Research*, 7, 50–58. doi:10.5424/sjar/2009071-397.
- Carmona-Benjumea, A. (2001). Datos antropométricos de la población laboral española. *Prevención, trabajo y salud: Revista del Instituto Nacional de Seguridad e Higiene en el Trabajo*, 14, 22–35. URL: http://www.insht.es/InshtWeb/Contenidos/Documentacion/TextosOnline/Rev_INSHT/2001/14/artFondoTextCompl.pdf. (accessed 2018-02-26).

- 385 Cecchini, M., Colantoni, A., Massantini, R., & Monarca, D. (2010). Estimation of the risks of thermal stress due to the microclimate for manual fruit and vegetable harvesters in central Italy. *Journal of agricultural safety and health*, *16*, 141–159. doi:10.13031/2013.32040.
- Chad, K. E., & Brown, J. M. M. (1995). Climatic stress in the workplace: its effect on thermoregulatory responses and muscle fatigue in female workers. *Applied ergonomics*, *26*, 29–34. doi:10.1016/0003-6870(95)95749-P.
- 390 Diano, M., Valentini, M., Samele, P., & Di Gesu, I. (2016). Exposure to hot environments of horticultural greenhouses workers of the center of Calabria: evaluative comparison methods. *Italian Journal of Occupational and Environmental Hygiene*, *7*, 56–114. URL: [http://refhub.elsevier.com/S0168-1699\(17\)30818-9/h0075](http://refhub.elsevier.com/S0168-1699(17)30818-9/h0075). (accessed 2018-02-26).
- Ferentinos, K. P., Katsoulas, N., Tzounis, A., Bartzanas, T., & Kittas, C. (2017). Wireless sensor networks for greenhouse climate and plant condition assessment. *Biosystems Engineering*, *153*, 70–81. doi:10.1016/j.biosystemseng.2016.11.005.
- 395 Hernández, J., Bonachela, S., Granados, M. R., López, J. C., Magán, J. J., & Montero, J. I. (2017). Microclimate and agronomical effects of internal impermeable screens in an unheated mediterranean greenhouse. *Biosystems Engineering*, *163*, 66–77. doi:10.1016/j.biosystemseng.2017.08.012.
- ISO 7243:2017 (2017). *Ergonomics of the thermal environment – Assessment of heat stress using the WBGT (wet bulb globe temperature) index*. Standard International Organization for Standardization, Geneva, Switzerland.
- 400 ISO 7726:1998 (1998). *Ergonomics of the thermal environment e instruments for measuring physical quantities*. Standard International Organization for Standardization, Geneva, Switzerland.
- ISO 7730:2005 (2005). *Ergonomics of the thermal environment: analytical determination and interpretation of thermal comfort using calculation of the PMV and PPD indices and local thermal comfort*. Standard International Organization for Standardization, Geneva, Switzerland.
- 405 ISO 8996:2004 (2004). *Ergonomics of the thermal environment: Determination of metabolic rate*. Standard International Organization for Standardization, Geneva, Switzerland.
- ISO 9920:2007 (2007). *Ergonomics of the thermal environment: Estimation of thermal insulation and water vapour resistance of a clothing ensemble*. Standard International Organization for Standardization, Geneva, Switzerland.
- Kittas, C., Bartzanas, T., & Jaffrin, A. (2003). Temperature gradients in a partially shaded large greenhouse equipped with evaporative cooling pads. *Biosystems Engineering*, *85*, 87–94. doi:10.1016/S1537-5110(03)00018-7.
- 410 Kittas, C., Katsoulas, N., Bartzanas, T., Mermier, M., & Boulard, T. (2008). The impact of insect screens and ventilation openings on the greenhouse microclimate. *Transactions of the ASABE*, *51*, 2151–2165. URL: <https://elibrary.asabe.org/abstract.asp?aid=25396>. (accessed 2018-02-26).
- López, A., Valera, D. L., Molina-Aiz, F., & Peña, A. (2012). Sonic anemometry measurements to determine airflow patterns in multi-tunnel greenhouses. *Spanish Journal of Agricultural Research*, *10*, 631–642. doi:10.5424/sjar/2012103-660-11.
- López, A., Valera, D. L., Molina-Aiz, F. D., & Peña, A. (2013). Effectiveness of horizontal air flow fans supporting natural ventilation in a mediterranean multi-span greenhouse. *Scientia Agricola*, *70*, 219–228. doi:10.1590/S0103-90162013000400001.
- López-Martínez, J., Blanco-Claraco, J. L., Pérez-Alonso, J., & Callejón-Ferre, A. J. (2018). Distributed network for measuring climatic parameters in heterogeneous environments: Application in a greenhouse. *Computers and Electronics in Agriculture*, *145*, 105–121. doi:10.1016/j.compag.2017.12.028.
- 420 Marucci, A., Pagniello, B., Monarca, D., Cecchini, M., Colantoni, A., & Biondi, P. (2012). Heat stress suffered by workers employed in vegetable grafting in greenhouses. *J. Food, Agric. Environ*, *10*, 1117–21. URL: [http://refhub.elsevier.com/S0168-1699\(17\)30818-9/h0205](http://refhub.elsevier.com/S0168-1699(17)30818-9/h0205). (accessed 2018-02-26).
- Molina-Aiz, F. D., Valera, D. L., & Álvarez, A. J. (2004). Measurement and simulation of climate inside Almería-type greenhouses using computational fluid dynamics. *Agricultural and Forest Meteorology*, *125*, 33–51. doi:10.1016/j.agrformet.2004.03.009.
- 425 Okushima, L., Sase, S., Lee, I.-B., & Bailey, B. (2001). Thermal environment and stress of workers in naturally ventilated

- greenhouses under mild climate. *Acta Horticulturae*, 559, 793–798. doi:[10.17660/ActaHortic.2001.559.118](https://doi.org/10.17660/ActaHortic.2001.559.118).
- Parsons, K. (2013). Occupational health impacts of climate change: Current and future ISO Standards for the assessment of
430 heat stress. *Industrial health*, 51, 86–100. doi:[10.2486/indhealth.2012-0165](https://doi.org/10.2486/indhealth.2012-0165).
- Pérez-Alonso, J., Callejón-Ferre, A. J., Carreño-Ortega, A., & Sánchez-Hermosilla, J. (2011). Approach to the evaluation of the
thermal work environment in the greenhouse-construction industry of SE Spain. *Building and Environment*, 46, 1725–1734.
doi:[10.1016/j.buildenv.2011.02.014](https://doi.org/10.1016/j.buildenv.2011.02.014).
- Riemer, R., & Bechar, A. (2016). Investigation of productivity enhancement and biomechanical risks in greenhouse crops.
435 *Biosystems Engineering*, 147, 39–50. doi:[10.1016/j.biosystemseng.2016.03.009](https://doi.org/10.1016/j.biosystemseng.2016.03.009).
- Soni, P., Salokhe, V. M., & Tantau, H. J. (2005). Effect of screen mesh size on vertical temperature distribution in naturally
ventilated tropical greenhouses. *Biosystems Engineering*, 92, 469–482. doi:[10.1016/j.biosystemseng.2005.08.005](https://doi.org/10.1016/j.biosystemseng.2005.08.005).
- Srbínovska, M., Gavrovski, C., Dimcevic, V., Krkoleva, A., & Borozan, V. (2015). Environmental parameters monitoring in
precision agriculture using wireless sensor networks. *Journal of cleaner production*, 88, 297–307. doi:[10.1016/j.jclepro.
440 2014.04.036](https://doi.org/10.1016/j.jclepro.2014.04.036).
- Tong, G., Christopher, D., & Li, B. (2009). Numerical modelling of temperature variations in a chinese solar greenhouse.
Computers and electronics in agriculture, 68, 129–139. doi:[10.1016/j.compag.2009.05.004](https://doi.org/10.1016/j.compag.2009.05.004).
- Vox, G., Losito, P., Valente, F., Consoletti, R., Scarascia-Mugnozza, G., Schettini, E., Marzocca, C., & Corsi, F. (2014). A wire-
less telecommunications network for real-time monitoring of greenhouse microclimate. *Journal of Agricultural Engineering*,
445 45, 70–79. doi:[10.4081/jae.2014.237](https://doi.org/10.4081/jae.2014.237).
- Vox, G., Teitel, M., Pardossi, A., Minuto, A., Tinivella, F., & Schettini, E. (2010). Chapter 1: Sustainable greenhouse systems.
Sustainable agriculture: technology, planning and management. Nova Science Publishers, Inc., New York, NY, USA, (pp.
1–79).
- Zhao, J., Zhu, N., & Lu, S. (2009). Productivity model in hot and humid environment based on heat tolerance time analysis.
450 *Building and environment*, 44, 2202–2207. doi:[10.1016/j.buildenv.2009.01.003](https://doi.org/10.1016/j.buildenv.2009.01.003).
- Zhao, Y., Teitel, M., & Barak, M. (2001). Se—Structures and environment: Vertical temperature and humidity gradients in a
naturally ventilated greenhouse. *Journal of Agricultural Engineering Research*, 78, 431–436. doi:[10.1006/jaer.2000.0649](https://doi.org/10.1006/jaer.2000.0649).
- Zorzeto, T. Q., & Leal, P. A. M. (2017). Wireless sensor network to map the meteorological variability in a greenhouse with
evaporative cooling. *Acta Horticulturae*, 1154, 213–220. doi:[10.17660/ActaHortic.2017.1154.28](https://doi.org/10.17660/ActaHortic.2017.1154.28).